





 PLASTITEC PLASTICOS TECNICOS PLANTA PRODUCTOS MEDICO FARMACEUTICOS		MANUAL TECNICO / TECHNICAL MANUAL		FT-DT-0950	
FICHA TECNICA / DATA SHEET BAG 5792		VERSION: 9		PAG / PAGE: 1 OF 1 Documento controlado /Controlled Document	
Elaboró/Prepared by: Ma. Isabel Colmenares Fecha/Date: 2022.01.14 Firma/Sgnt:  Position: Director Gestion Calidad / Quality Director		Revisó/Reviewed by: Diego Orozco Fecha/Date: 2022.01.14 Firma/Sgnt:  Position: Director Producción / Production Director		Aprobó/Approved by: Eduardo Muñoz Fecha/Date: 2022.01.14 Firma/Sgnt:  Position: Director General / General Director	
Molde / Mould: Producto / Product name: BOLSA NUTRIBAG L 250mL BCT-EE		Plano/Drawing:		Pais/Country:	
Cliente / Customer:		VARIOS/SEVERAL		Pais/Country:	
1 MATERIALES / MATERIALS		COD.		OBSE. / NOTES	
1 BOLSA BCT-EE 250mL		5784		FT-DT-0940 v10*	
2 ENSAMBLE LUER LOCK		1119		FT-E-0078 v7	
2 MATERIAL EMPAQUE / PACKAGING MATERIALS		COD.		DIMENSION/DIMENSION	
2.1 CAJA No.5B / BOX No.5B		00096_E		45,0x45,0x22,6	
2.2 PAPEL GRADO MEDICO PLANO / MEDICAL GRADE PAPER		00091_E		32x25	
2.3 BOLSA PE INTERNA / INTERNAL PE BAG		00109_E		50,8x63,0	
2.4 BOLSA PE EXTERNA / EXTERNAL PE BAG		00109_E		50,8x63,0	
2.5 ETIQUETA INTERNA / INTERNAL LABEL		00036_I		2.5X10.0	
2.6 ETIQUETA EXTERNA / EXTERNAL LABEL		00037_I		5.0X10.0	
2.7 CINTA TRANSPARENTE / TRANSPARENT TAPE		00022_E		2"	
2.8 CINTA IMPRESA / PRINTED TAPE		00105_E		2"	
3 CONTROL DIMENSIONAL/ DIMENSIONAL CONTROL		Measure		PARAMETRO/PARAMETER mm	
3.1 Longitud Externa / External Length		NA		NA	
3.2 Ancho / Flat Width		NA		NA	
3.3					
3.4					
3.5					
3.6					
3.7					
4 PRUEBAS/TEST		NORMA INTERNA / INTERNAL STANDARD			
4.1 Prueba Estallido / Burst Test		NA			
4.2 Prueba Hermeticidad / Hermeticity Test		NA			
4.3 Prueba Rasgado / Tear off test		NA			
4.4 Prueba de Partículas / Particle Test		NA			
4.5 Prueba de Impresión / Printing Test		NA			
5 OBSERVACIONES / NOTES					
5.1 Verificar integridad de empaque antes de usar / Verify packaging's integrity before use.					
5.2 Almacenamiento / storage: Temperatura / Temperature 15-30 °C - Humedad relativa hasta / relative humidity up to 80%					
5.3 (*)PROVEEDORES ALTERNOS					
5.4					
5.5					
5.6					
5.7					
5.8					
5.9					
5.10					
5.11					



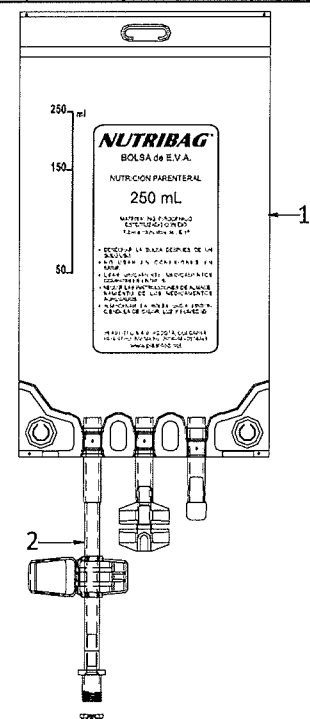

FT-DT-0950-9

2022 ENE 14

 AZUL EN EL ORIGINAL

2023 ENE 10

 COPIA NO CONTROLADA